

Fire detection and evacuation solutions that save lives.

8 Way Switch & Indicator Module

Features

- Provides 8 Programmable Switches.
- Provides 8 Status LEDs
- Customisable Switch Identification Label
- Fully programmable via LoopMaster and ConfigManager Plus.
- Suitable for use with FireFinder Plus
- Suitable for use with LoopSense
- Suitable for use with ZoneSense Plus
- Function and Cause and Effect programmable


Description

The 8 Way Switch & Indicator Module has been designed to interface with AMPAC's range of Fire Alarm Control Panels (FACP's).

Each switch can be configured as either a Momentary or Toggle switch and can be programmed to control the various FACP or system output such as relays, monitored outputs and Loop device outputs.

The LED's are used to indicate the status of the switch.

The switches and LEDs are programmed by the Configuration tools such as ConfigManager (FireFinder range of panels) or LoopMaster (LoopSense) or by the ZoneSense Plus front panel.

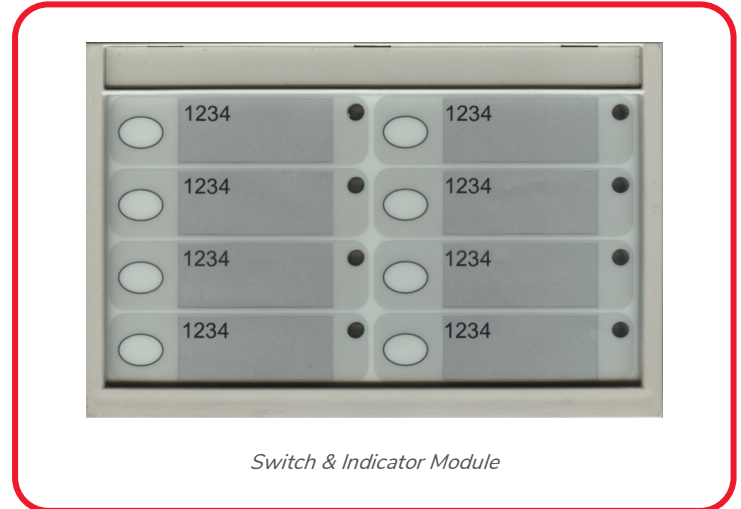

Switch & Indicator Module

Specifications

Voltage	27Vdc
Quiescent Current	3.6mA
Max Current	8mA
Communication	RS485
System Capacity:	
FireFinder Plus	15 Max depending on panel
LoopSense	15 Max depending on panel
ZoneSense Plus	1 Max
Temperature	-5°C to 55°C
Humidity	0% - 95% non condensing
Weight	100 grams

Item Numbers

4310-0030	Switch and Indicator Card
LAB1483.doc	Slip in Label Template