

FireFinder Plus NZS4512 – Intelligent Analogue Addressable Fire Control Panel

Features

- Fully Expandable 1 to 8 Loop Fire Alarm Control Panel
- Large Graphic (240 x 64 pixel) Display
- 500mA Loop Current
- 4 Programmable Monitored Inputs
- 4 Programmable Monitored Sounder Outputs
- 5 Programmable Relays
- 2 Auxiliary Power Outputs
- Programmable via front panel
- Networkable
- Supports High Level Graphics Interface
- Supports a Range of Panel Add-ons
- Rack Mount options available
- NZS4512:2010 compliant

Description

FireFinder Plus is an Intelligent Analogue Addressable Fire Alarm Control Panel that is available in 1 to 8 loop panel options.

The **FireFinder Plus** is suitable for medium to large sized fire detection systems and is compatible with Apollo XP95, Discovery and Series 90 detectors.

Powerful and flexible programming is achieved via AMPAC's configuration tool **ConfigManager Plus** which includes many pre-engineered programming functions. Simple system programming is easily achieved via the front panel.

FireFinder Plus is configurable as a peer to peer network allowing up to 200 Loops to be configured.

FireFinder Plus supports a large range of internal and external optional Panel Add-ons.


- Fire Fan Control Module
- 8-way Switch and Indicator Module
- 32 Zone Alarm Indicator Module
- Zone Disable and Indicator Module
- 16-way Input Board
- 8-way Relay Board
- 8-way Sounder Board
- 8 Zone Conventional Board
- Front panel mounted printer
- *SmartTerminal* (LCD Repeater)



FireFinder Plus SP1M Control Panel

The **FireFinder Plus** is available in four standard cabinet options.

- SP1M – accommodates up to 4 Loops, 64 Zone LEDs (32 as standard) and 2 Add-on termination boards
- SP1X – includes a locked glazed outer door and accommodates up to 4 loops, 2 Add-on modules and 2 Add-on termination boards
- SP8X – has a locked glazed outer door and accommodates up to 8 loops, 4 Add-on modules and 4 Add-on termination boards

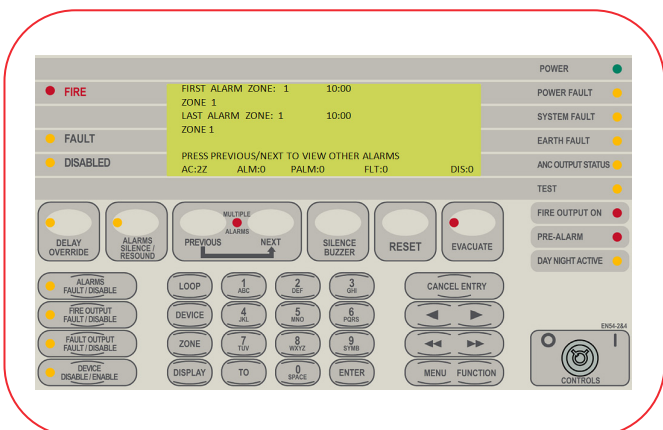

FireFinder Plus Controls and Indicators

FireFinder Plus NZS4512 – Intelligent Analogue Addressable Fire Control Panel

Item Numbers

Panels

8656-0108	FireFinder Plus 1 Loop 32Z 5A SP1M
8656-0110	FireFinder Plus 1 Loop 5A SP1X
8656-0113	FireFinder Plus 1 Loop 5A SP8X

Panel Extras

4210-0042	SP1X/M Cabinet Flush Surround
4210-0044	SP8X Cabinet Flush Surround
4210-0040	SP1X/M Batter Cabinet
4210-0041	SP8X Battery Cabinet

Panel Add-ons

8610-0001	Slave CPU Board (Loop Activation)
8610-0002	Dual Loop Termination Board
4210-0006	2 Wire Network Interface Board
4310-0021	Fire Fan Module
4310-0030	8-way Switch and Indicator Module
4310-0040	16-way Input Board
4310-0050	8-way Relay Board
4310-0060	8-way Sounder Board
4310-0080	HLI Expander Board
4310-0082	8 Zone Conventional Board
4310-0085	32Z Alarm Indicator Card (SP1M)
4310-0086	32Z Alarm Indicator Module (SPX range)
4310-0087	Zone Disable & Indicator Module

Repeater Panels

4380-0001	SmartTerminal ABS
4380-0002	SmartTerminal inc PSU ABS
4380-0003	SmartTerminal Slimline ABS

Note – Other Panel option and accessories available. Contact the Ampac Office for details

Specifications

	Cabinet SP1M/SP1X	Cabinet SP8X
Power Supply	5A PSU version	5A PSU version / 22A PSU Version
Input Voltage	195 - 264VAC	195 - 264VAC
Protection	2Amp 3AG	2Amp 3AG (5A PSU) / 5Amp 3AG (22A PSU)
Output Current	5.6Amps	5.6Amps / 22Amp
Charger Current	1.25A	1.25A / 3A
Power Supply Output Voltage:	27.5VDC +/- 0.1VDC	
Power Supply Ripple Voltage:	200mV	
Power Supply Fault - Volts High (room temperature)	28VDC	
Power Supply Fault - Volts Low	26.5VDC	
Charger Output Voltage:	27.5 +/- 0.1VDC	
Battery Type:	2 x 12V Sealed Lead Acid	
Maximum Battery Capacity:	26Ahr (SP1M/X), 40Ahr (SP8X)	
Discharge Cut-off voltage:	21VDC	
Panel Quiescent Current		
1 Loop	220mA	
Additional Loops (even)	+40mA for each Loop	
Additional Loops (odd)	+75mA for each Loop	
Loop Capacity	500mA max per Loop	
Max No of Devices per Loop	126	
Cabling Requirements	2 core 1.5 to 2.5mm ²	
Fault supervision	O/C, S/C, Over current	
Number of Zones	999	
Devices Per Zone	32 Max	
Outputs: (Programmable)	4 x 24VDC @ 500mA Max, 10K EOL	
Relay outputs (Programmable)	5 x Voltage Free - 24VDC@1A	
Auxiliary Power Outputs	2 x 24VDC @ 500mA	
Inputs (Programmable)	4 x O/C, S/C, 10K EOL	
Comms External to FACP	RS485	
Comms Printer port	RS232 or Parallel	
Comms PC Interface	RS232 or USB 2.0	
Temperature	-5°C to + 40°C	
Humidity	25% to 95% (non-condensing)	
Mechanical		
Material	1.2mm Mild Steel	
Colour/Finish	Surf Mist Ripple (Dulux)	
Dimensions (mm)		
SP1M	425H x 400W x 125D	
SP1X	425H x 400W x 125D	
SP8X	845H x 518.5W x 173D	
SP16X	1200H x 625X x 240D	
IP Rating	IP30 (Indoor Use Only)	



WORLD LEADER OF INNOVATIVE SOLUTIONS
IN FIRE DETECTION AND ALARM SYSTEMS

Australia +61 8 9201 6100 Europe +44 (0) 1302 833 622 New Zealand +64 9443 8072



www.ampac.net

2 of 2