- Choice of red, amber, clear or blue colour lens
- Shallow base IP43 and deep base IP65 versions available
- Unique dual power wiring configuration for energy saving installation
- Designed to work with both conventional and twowire (SAV-WIRE®) systems


## **Description**

The VXB Beacon is designed for use with conventional fire alarm systems, including two wire (SAV-WIRE®) and other general 24Vdc applications. The beacon has been designed for maximum all-round visibility, coupled with low power consumption, utilising an array of energy-efficient LEDs.

The product is designed with particular consideration to system power demands and uniquely comes with two wiring configurations for standard and low power settings.

The low current features of the product allow the installer to use a larger number of visual devices on a system and negates the need for additional power supplies.

## **Dimensions**

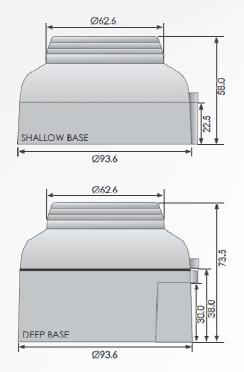



Vantage LED Beacons

## **Item Numbers**

| Item No      | Description                      |
|--------------|----------------------------------|
| VXB-SB-RB/R  | Shallow Base Red Body Red Lens   |
| VXB-DB-RB/RL | Deep Base Red Body Red Lens      |
| VXB-SB-WB/RL | Shallow Base White Body Red Lens |
| VXB-DB-WB/RL | Deep Base White Body Red Lens    |

## **Specifications**

| opeemeations      |   |
|-------------------|---|
| Operating Voltage | 20 - 35V DC                             |
| Supply Current    | Standard 5mA @ 24Vdc<br>Low 3mA @ 24Vdc |
| Light Output @ 1M | Standard 0.7W Low 0.4W                  |
| Flash Rate        | 1 per second (1Hz)                      |
| Operating Temp.   | -20℃ +70℃                               |
| Humidity          | 0 to 95% Non-condensing                 |
| Material          | ABS fire retardant plastic              |
| Dimensions        |   |
| Shallow Base      | 94mm Ø x 58mm H                         |
| Deep Base         | 94mm Ø x 74mm H                         |
| IP rating         | IP43 (shallow)                          |
|                   | IP65 (deep)                             |
| Weight            | 145g (shallow)                          |
|                   | 165g (deep)                             |
|                   |   |

www.ampac.net

ADVANCED WA

ANING SYSTEMS